

THE WORLD LEADER IN FUME EXTRACTION TECHNOLOGY



Advantage

BOFA's AD 1500 iQ high end laser extraction system combines extremely large filter capacity with high airflow and pressure rates, making it the ideal choice for heavy duty applications that generate large amounts of particulate and gaseous organic compounds.

Performance has now been further enhanced with the inclusion of several new features including BOFA's new iQ Operating System, making the new AD 1500 iQ one of the most advanced system available.

The iQ system takes performance and safety parameters to a new level and ensures that maintenance, downtime and ownership costs are kept to a minimum.

STANDARD FEATURES:

- High airflow and pressure rates
- Reverse flow filter technology
- DeepPleat DUO pre filter
- Combined HEPA/Gas filter incorporating ACF technology
- Filters with long life and low replacement cost
- Automatic flow control system
- Real time airflow reading
- Independent filter condition monitoring, display and warnings
- High contrast display
- 'Run safe' operation
- Remote diagnostics via USB

OPTIONAL FEATURES:

- Smart Filter technology
- VOC gas sensor (Volatile Organic Compound)
- Remote stop / start interface
- Filter change / System fail signal
- Interfacing with host laser
- On-board compressor
- Optional filter media's

The high end laser fume extraction system for laser marking, coding and engraving industries.



iQ Intelligent Technology



Featuring DeepPleat DUO filter technology




Featuring Advanced Carbon Filter technology



Optional Smart Filter technology

For high performance and long filter life

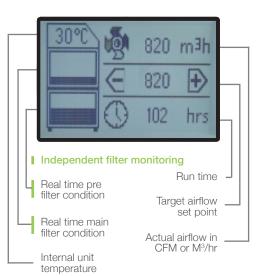





http://www.bofa.co.uk/igOperationSystem.asp



Take a look at the iQ animation, which explains exactly why the BOFA iQ Operating System provides unrivalled control and data management for your fume extraction unit.

UNITS - PART NUMBERS		OPTIONS				
Model	Voltage	Part No.	24V Stop / Start	Filter change / System failure signal	VOC Monitoring	On-board Compressor
AD 1500 iQ Stainless Steel	230V	L0872	A2001	A2002	A2003	A2007
AD 1500 iQ Powder Coated	230V	L0862				

REPLACEMENT FILTERS - PART NUMBERS				
Model	DeepPleat DUO Pre Filter	Combined HEPA/Gas Filter		
AD 1500 iQ	A1030222	A1030297		

TECHNICAL DATA		
	230V	
Dimensions (HxWxD)	1197 x 600 x 790mm (47.1 x 23.6 x 31.1")	
Cabinet Construction	Brushed stainless steel / Powder coated mild steel	
Airflow / Pressure	1350m³/hr (795cfm) / 100mbar	
Electrical Data	230v 1ph 50/60Hz Full load current: 24 amps / 3.3kw	
Noise Level	< 63dBA*	
Weight	145kgs (320lbs)	
Approvals	CE	

DEEPPLEAT DUO PRE FILTER SPECIFICATIONS		
Surface Media Area	30m² approx	
Filter Media	Glass Fibre	
Filter Media Construction	Maxi Pleat Construction with Webbing Spacers	
Filter Housing	Zintec mild steel	
Filter Efficiency	F8 (95% @ 0.9 microns)	


COMBINED HEPA/GAS FILTER SPECIFICATIONS			
Surface Media Area	7.5m ² approx		
HEPA Filter Media	Glass Fibre		
HEPA Media Construction	Maxi Pleat Construction with Webbing Spacers		
Filter Housing	Zintec Mild Steel		
Treated Activated Carbon	34kgs		
Filter Efficiency	99.997% @ 0.3 microns		

AIRFLOW THROUGH FILTERS Chemical Filter HEPA Filter Pre Filter Small particulate is held in the HEPA filter Clean Air Medium sized particulate Contaminated Air held in the filter media Velocity drops Particulate through expansion

Large particulate settles to the bottom of the filter box

TECHNICAL SPECIFICATION

- 1 iQ Display2 On / Off Switch
- 3 Power Cable
- 4 Signal / Interface Cable
- 5 Castors
- 6 Door Hinge
- 7 Hose Inlet Connection 125mm
- 8 Exhaust Outlet
- 9 Motor Cooling Inlet
- 10 Door Latch
- 11 Motor Cooling Outlet
- 12 Standby Button

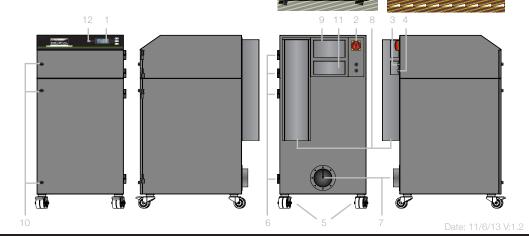





Tel: +44 (0) 1202 699 444 Fax: +44 (0) 1202 699 446 Email: sales@bofa.co.uk Web: www.bofa.co.uk









British Quality